



- (51) **International Patent Classification:**
B65F 3/02 (2006.01) *G01G 19/12* (2006.01)
- (21) **International Application Number:**
PCT/SE2022/050184
- (22) **International Filing Date:**
21 February 2022 (21.02.2022)
- (25) **Filing Language:** English
- (26) **Publication Language:** English
- (30) **Priority Data:**
2150588-8 10 May 2021 (10.05.2021) SE
- (71) **Applicant:** **DAPROX AB** [SE/SE]; Box 120, 127 23 Skärholmen (SE).
- (72) **Inventors:** **ÅKERBLOM, Bengt**; Vårby Allé 23, 143 40 Vårby (SE). **HEMLÉN, Mikael**; Visirvägen 6, Lgh 1202, 141 74 Segeltorp (SE).
- (74) **Agent:** **ZACCO SWEDEN AB**; P.O. Box 5581, Valhallavägen 117N, 114 85 Stockholm (SE).
- (81) **Designated States** (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DJ, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, IT, JM, JO, JP, KE, KG, KH, KN, KP, KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, WS, ZA, ZM, ZW.
- (84) **Designated States** (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK,

(54) **Title:** AN IN-MOTION WEIGHING SYSTEM

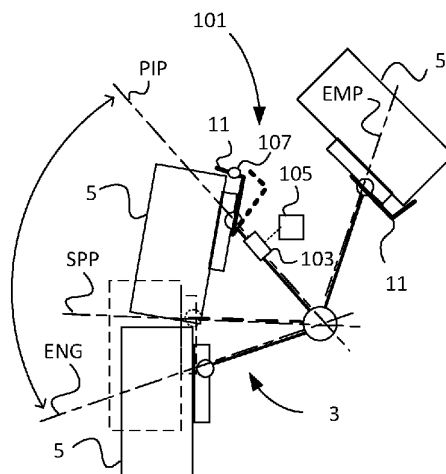


Fig. 3a

(57) **Abstract:** The present invention concerns an in-motion weighing system (1) comprising a frame arrangement (3) designed to move a can device (5) from an engagement position (ENG) to an emptying position (EMP). The invention further concerns a dynamic weighing unit (101) configured to weigh the can device (5) in any position and/or continuously along a motion path from the engagement position (ENG) to the predetermined intermediate position (PIP), wherein the dynamic weighing unit (101) is configured to detect start of motion of the can device (5) and/or frame arrangement (3) and configured to detect motion and/or activation of a locking device (11, 11', 11'') in the predetermined intermediate

EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV,
MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM,
TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW,
KM, ML, MR, NE, SN, TD, TG).

Published:

— *with international search report (Art. 21(3))*